



“Experimental and FEA Investigation of V Shape Spring with Materials”

Pavan S. Baravkar, Dr. Amol D. Lokhande,
Sandip University, Nashik, Maharashtra, India

*Corresponding author Email: pavanbaravkar49@gmail.com

Abstract. The Automobile Industry has shown keen interest for replacement of steel leaf spring with that of progressive rate spring unit, since that has good part loading and minor to maximum shock absorption properties. In this paper we have outline on the new mechanism for progressive rate spring. The main leaf spring and V- shape strip spring model is created by modeling software like Pro-E. The dimensions of an existing conventional steel leaf spring of a light commercial vehicle are taken for modeling. And the structural analysis of both springs is carried via finite element analysis using ANSYS-12 software. Result shows that, the V-shape strip spring has Total deflection 16.93 % & Strain energy 38.20 % more than steel leaf Spring for partly loading. It also shows equivalent von- mises stresses for both spring. It is observed that the V- shape strip spring is great under part loading i.e. minimum loading action and main leaf spring is superior for maximum loading condition so that the whole unit of this progressive rate spring is best suitable for carrying export quality fruit from farm to wear house or customer market and mini ambulance vehicle. All material used in this unit is easily available, so it commercially adopted in automotive mini trailer manufacturer. Also it has less complexity and economically advantageous for middle class farmer.

Keywords: Leaf spring, V-shape strip spring, FEA, Static loading, Total deflection, E-Glass/ Epoxy, Re-Manufacturing, Effort Factors, CSFS, Critical Factors.

1. Introduction

Finite Element analysis tools offer the tremendous advantage of enabling design teams to consider virtually any molding option without incurring the expense associated with manufacturing and machine time. The Ability to try new designs or concepts on the computer gives the opportunity to eliminate problems before beginning production.[1] Additionally, designers can quickly and easily determine the sensitivity of specific molding Parameters on the quality and production of the final part. The main leaf spring and V- shape strip spring model is created by modeling software like Pro-E and it is imported in to the analysis software ANSYS- 12, the loading, boundary conditions are given to the imported model and result are evaluated by post processor. The different comparative results of main steel leaf spring and V- shape strip spring are obtained to predict the advantages of V- shape strip spring for progressive rate loading for mini trailer which is used in farm for carrying export qualityfruit. The passive suspensions have inherent limitations as a consequence of the choice of elastic and damping characteristics to ensure an acceptable behavior for the entire working frequency range. The need to obtain a compromise between the conflicting requirements among different vibrations modes of the vehicle justify the research of the active suspension systems, the intelligence being determined by a controller that takes data from the vehicle dynamics

Introduction Of Structural Analysis: Finite Element analysis tools offer the tremendous advantage of enabling design teams to consider virtually any molding option without incurring the expense associated with manufacturing and machine time. The Ability to try new designs or concepts on the computer gives the opportunity to eliminate problems before beginning production. Additionally, designers can quickly and easily determine the sensitivity of specific molding Parameters on the quality and production of the final part. The spring model is created by modeling software like Pro-E , and it is imported in to the analysis software and the loading, boundary conditions are given to the imported model and result are evaluated by postprocessor.

2. FEA Procedure (Finite Element Analysis)

FEA tool is the mathematical idealization of real system. Is a computer based method that breaks geometry into element and link a series of equation to each, which are then solved simultaneously to evaluate the behavior of the entire system. It is useful for problem with complicated geometry, loading, and material properties where exact analytical solution are difficult to obtain. Most often used for structural, thermal, fluid analysis, but widely applicable for other type of analysis and simulation.[6] Figure 2.1 shows procedure of FEA.

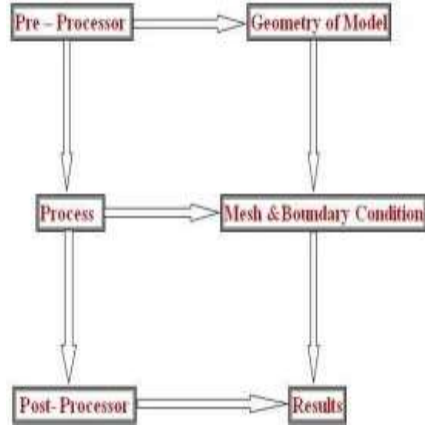


FIGURE 1. Typical FEA procedures by commercial software (ANSYS-12)[6]

Materials For Spring: Plain carbon steel, Chromium vanadium steel, Chromium- Nickel- Molybdenum steel, Silicon manganese steel, are the typical materials that are used in the design of leaf springs. The material selected for steel leaf spring is 65Si7. The design parameters selected for steel leaf are listed in table.

TABLE 1. Design Parameters of Steel Leaf Spring. [6]

Parameters	Values
Material selected Steel	65Si7
Tensile strength	1962 N/mm ²
Yield strength	1470 N/mm ²
Young's modulus(E)	2e5 N/mm ²
Total length	650 mm
Arc height at axle seat	76 mm
Normal static loading (max)	2500 N
Available space for spring width	50 mm X 6 mm
Number of leaves	02

TABLE 2. Design Parameters of Steel V-Shape Strip Spring.

Parameters	Values
Material selected Steel	65Si7
Tensile strength	1962 N/mm ²
Yield strength	1470 N/mm ²
Young's modulus(E)	2e5 N/mm ²
Total length between V end	100 mm
Included angle of V- shape	45°
Normal static loading (max)	2500 N
Available space for spring width	30 mm X 4 mm
Number of strip	01

Geometry Of Main Leaf Spring & V- Shape Strip Spring: Figure 2.2 shows the imported geometry of mono leaf spring & figure 2.3 shows the imported geometry of V- shape strip spring. This geometry has been created in Pro-E. Figure shows the 3D model of leaf spring with camber of leaf spring. Total length of mono leaf is 650mm and 76mm is the arc height at axel seat.

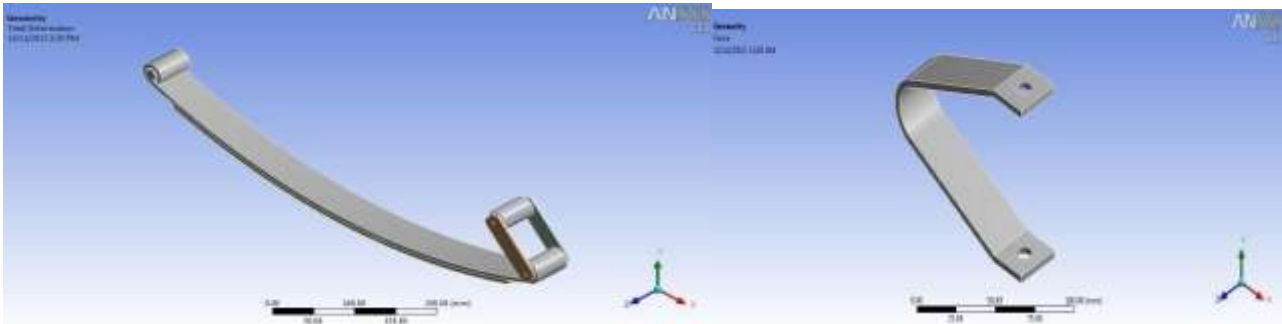


FIGURE 2. Geometry of Main Leaf Spring.

FIGURE 3. Geometry of V- Shape Strip Spring.

Meshed Model Of Main Leaf Spring & V- Shape Strip Spring: Meshing is nothing but the discretization of object into the small parts called as the element. Figure 2.4 & figure 2.5 shows the meshed model of both spring with brick and triangular elements are used. Previous Studies show that the best results are obtained using brick mesh.

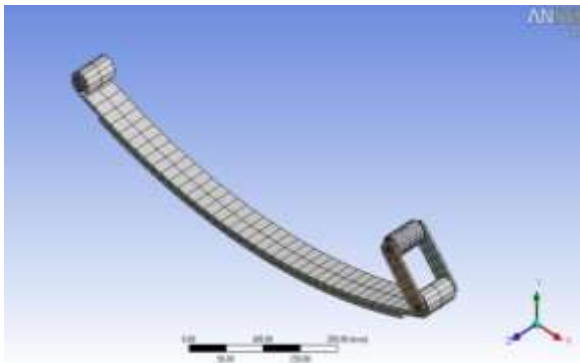


FIGURE 4. Meshed Model of Main Leaf Spring.

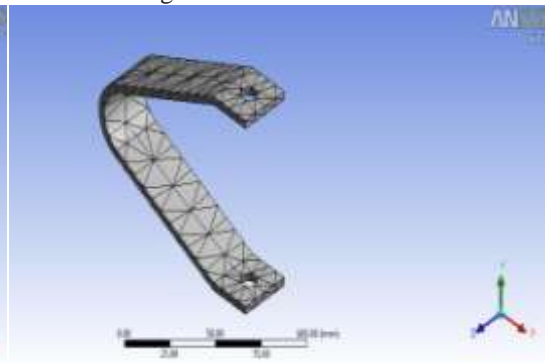


FIGURE 5. Meshed Model of V- Shape Strip Spring.

2.4 Loading & Boundary Conditions Main Leaf Spring & V- Shape Strip Spring: Fixed Support: Fixed support has restriction to move in X and Y direction as well as rotation about that particular point. For the leaf spring analysis one eye end of the leaf spring is fixed to the chassis of the vehicle. So this eye end of the leaf spring cannot move in any of the directions i.e. all the degrees of freedom are blocked. V- shape strip spring expands & compress in up and down direction so it has no any fixed support but it firmly attached with main leaf spring at up side & bracket at down side in assembly of whole unit. Displacement support: As there is shackle provided at other end of the leaf spring because of which the leaf spring only translates in one plane and other movements i.e. degree of freedom are blocked. So with the reference of this a displacement support is applied to the other eye end of leaf spring model. This support allows the movement of the leaf spring in X axis, rotation about Z axis and fixed along Y axis.[6] Also for V-shape strip spring curvature end having free movement in X & Y axis Direction but constant in Z axis.

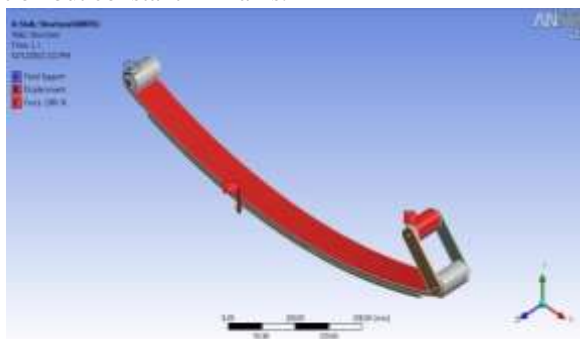


FIGURE 6. Loading & Boundary Conditions of Main Leaf Spring.

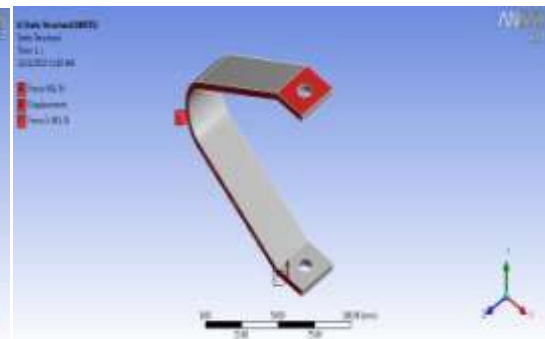


FIGURE 7. Loading & Boundary Conditions of V-Shape Spring.

Since the load is uniformly distributed on the leaf spring, here in this study uniformly distributed load 1380N which is 20% more of the unladen weight of trailer. For V- shape strip spring it uniformly distributed load 690N that is applied on doth side from upward and downward of spring model. The uniformly distributed load is shown in figure 6 & figure 7. Results and Discussion: *Total Deflection of Main Leaf Spring & V- Shape Strip Spring:*

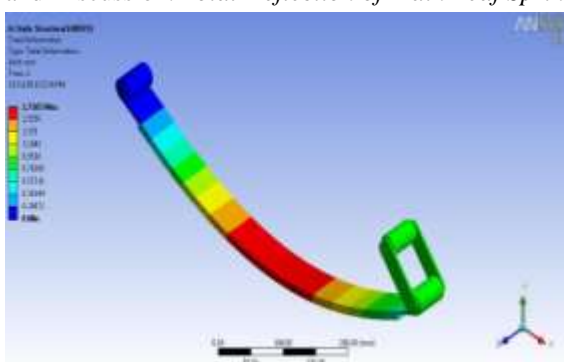


FIGURE 8. Total Deflection of Main Leaf Spring.

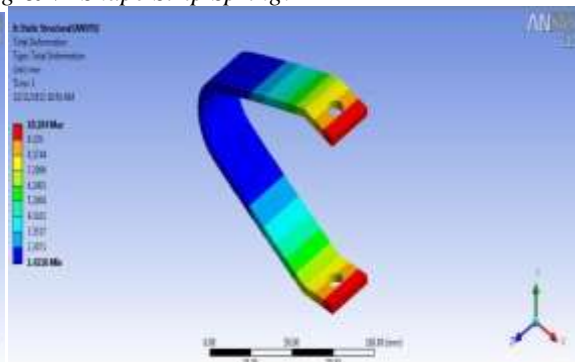


FIGURE 9. Total Deflection of V- Shape Strip Spring.

Figure 2.8 shows the deflection of steel leaf spring & Figure 2.9 shows the deflection of steel V- shape strip spring with leaf spring under the application of 1380N total load. The maximum deflection is at the centre of the leaf spring is 1.71 mm and

V- shape strip spring its maximum value is 10.10mm from both side. Red zone indicates the area of maximum deflection and blue zone indicates the area of minimum deflection, which are shown by color band. According to this v- shape spring shows the 16.93 % more deflection than leaf spring. Stress for Main Leaf Spring & V- Shape Strip Spring.

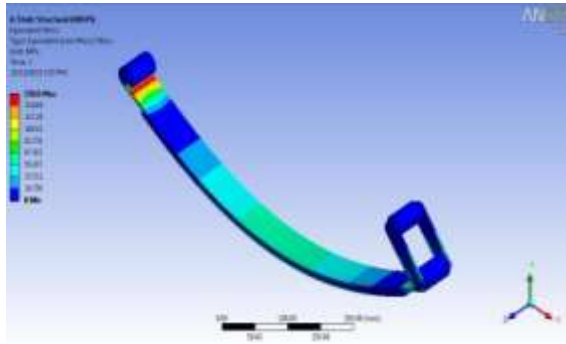


FIGURE 10. Stress for Main Leaf Spring.

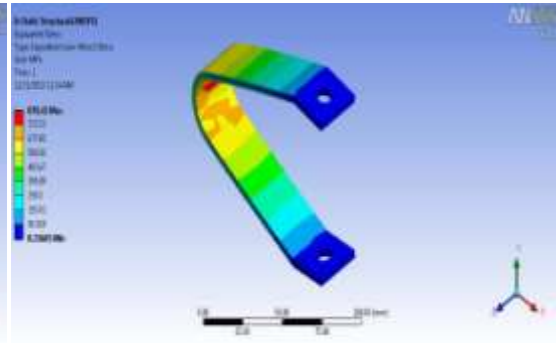


FIGURE 11. Stress for V- Shape Strip Spring.

Figure 2.10 & figure 2.11 shows the equivalent von-miss stress induced in steel leaf spring and V- shape strip spring under the action of 1380N load. The maximum stress is induced at nearer to fixed eye end of leaf spring and the curvature end of V- shape strip spring its maximum value is 150.8N/mm^2 & 870.42N/mm^2 respectively. Red zone indicates the area of maximum stress and blue zone indicates the area of minimum stress. Strain Energy for Main Leaf Spring & V- Shape Strip Spring.

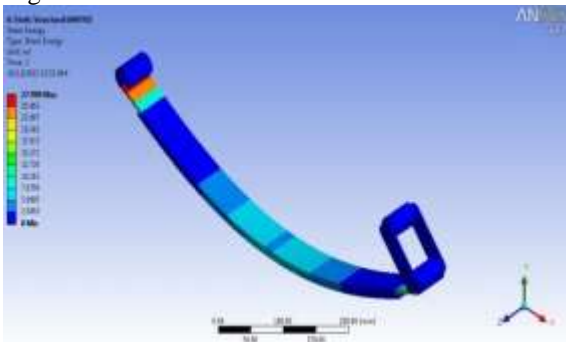


FIGURE 12. Strain for Main Leaf Spring.

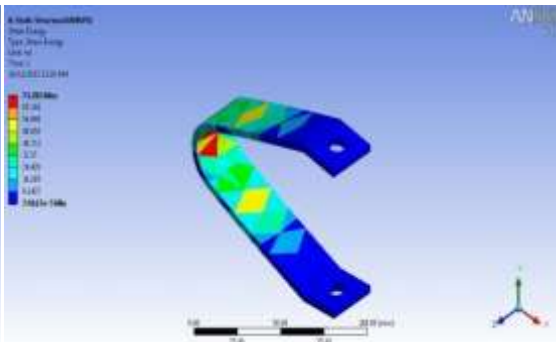


FIGURE 13. Strain for V- Shape Strip Spring.

Figure 2.12 & figure 2.13 shows the strain energy induced in steel leaf spring and V- shape strip spring under the action of 1380N load. The maximum strain energy is induced at nearer to fixed eye end of leaf spring and the curvature end of V- shape strip spring its maximum value is 27.998MJ & 73.283MJ respectively. Red zone indicates the area of maximum stress and blue zone indicates the area of minimum stress.

3. Conclusion

The 3-D modeling of both steel spring is done and analyzed A comparative study has been made between V- shape strip spring and leaf spring with respect to Total deflection, von-miss stresses and strain energy. From the results, It is observed that the V- shape strip spring shows more deflection i.e 16 % and strain energy 38.20 % than that of steel leaf spring material. It is observed that the V- shape strip spring is great under part loading i.e. minimum loading action and main leaf spring is superior for maximum loading condition so that the whole unit of this progressive rate spring is best suitable for fruit carrying trailer and mini ambulance vehicle. The V- spring unit is gradually brought into operation according to the load being applied and progressively increases in proportion to the load being carried and also it is more economical than the conventional steel spring with similar design specifications.

Reference

- [1]. Rajeswaran, Ahamed, Suspension system in automobiles, PHI Learning Private Limited, New Delhi-01, pp. 25-45, 614–
- [2]. Trailer / Body Builders Journal, on “Trailer Independent Suspension a Huge Success”, Australia. October2000.
- [3]. kristinr.Brandenburg,johnr.Keough.independenttrailersuspensionutilizinguniqueadibracketbyappliedprocessinc. Technologies Div. - Livonia, Michigan, USA, 2002.
- [4]. firatbarlasizmir,ondesignofamarsroversuspensionmechanism,instituteoftechnologyizmir,Turkey,Jun2004.
- [5]. Timbren Industries Inc- ID10895 Axle-Less Trailer Suspension,2010.

- [6]. A. C. Baviskar, V. G. Bhamre, S. S. Sarode. "Design and Analysis of a Leaf Spring for automobile suspension system: A Review" International Journal of Emerging Technology and Advanced Engineering. Volume 3, Issue 6, June 2013.
- [7]. Lokhande, A. D., Shrivastava, R. L., & Shrivastava, R. R. (2014). A REVIEW ON CRITICAL SUCCESS FACTORS OF RE-MANUFACTURING. *International Journal of Entrepreneurship & Business Environment Perspectives*, 3(2), 982
- [8]. Shrivastava, R. L., Lokhande, A. D. (2016). LINKAGE BETWEEN EFFORT FACTORS AND ORGANIZATIONAL PERFORMANCE: REMANUFACTURING INDUSTRY. *International Journal of Management and Research*, 3, 301-310
- [9]. Shrivastava, R. L., Lokhande, A. D. (2015). DESIGN OF FRAMEWORK FOR IMPLEMENTATION OF CSFS IN REMANUFACTURING INDUSTRIES FOR PERFORMANCE IMPROVEMENT. *Industrial Engineering Journal*. 9(7).39-45.
- [10]. Shrivastava, R. R., Lokhande, A. D., & Shrivastava, R. L. (2015). "IDENTIFICATION AND EVALUATION OF CRITICAL FACTORS FOR PERFORMANCE IMPROVEMENT FOR REMANUFACTURING INDUSTRY" - A PILOT STUDY. *International Journal of Applied Engineering Research*. 10(11).10328-10335
- [11]. "E. WIELANDT" AND "G. STRECKEISEN" (1982), THE LEAF-SPRING SEISMOMETER: DESIGN AND PERFORMANCE, Vol. 72, No. 6, pp. 2349-2367
- [12]. Prof. N.P. Dhoshi¹, Prof. N.K. Ingoles², Prof. U.D. Gulhane, Analysis and Modification of Leaf Spring of Tractor Trailer Using Analytical and Finite Element Method, Vol.1, Issue.2, pp-719-722
- [13]. Y.S. Kong^a, S. Abdullah^{a,b}, M.Z. Omar^{a,b,*}, S.M. Haris. (2016), Failure assessment of a leaf spring eye design under various load cases, [Volume 63](#), May 2016, Pages 146-159
- [14]. Rajendra, S. Vijayarangan, (1999), Optimal design of a composite leaf spring using genetic algorithm, computer and structure 79(2001)1121-1129
- [15]. Dipendra Kumar Roy and Kashi Nath Sahab*, (2013) Nonlinear Analysis of Leaf Springs of Functionally Graded Materials, *Procedia Engineering* 51 (2013) 538 – 543
- [16]. Mahmood M. Shokrieh*, Davoodrezaei (2003), Analysis and optimization of a composite leaf spring, *Composite Structures* 60 (2003) 317–325
- [17]. Hayder H. Khaleel, Assaad Al Sahlani, Noor H. Dhaher and Nawfel M. Baqer (2018), MODELING AND ANALYSIS OF LEAF SPRING USING FINITE ELEMENTS METHOD, Volume 9, Issue 6, June 2018, pp. 48–56, Article ID: IJMET_09_06_007
- [18]. Sreeneshvaliyandi (2021), Dynamic Analysis of Leaf Spring with Structural steel, AlBamet, and Fiber Glass, Vol.9, Issue.2, pp.01-05
- [19]. SIVANAND. A1, DEVANATHAN. C2, Dr. SANTHANAM. V3 & DHANARAJ. R. (2020), DESIGN AND OPTIMIZATION OF GLASS FIBRE REINFORCED POLYMER COMPOSITE LEAF SPRING, Vol. 10, Issue 3, Jun 2020, 5045-5052
- [20]. Kalyani Sudhir Kulkarni¹, Prof. V. J. Khot (2015), Design and Development of Mono Leaf Spring by using Composite Material (Epoxy-Carbon Fiber), Vol-2, Issue-12 ISSN: 2349-6495
- [21]. S. Sivanandam^[1], Dr. M. Shankar^[2], M. Vivekanandhan, (2018), Design and Analysis of Composite Parabolic Leaf Spring for Light Vehicles, ISSN (e): 2250-3021, ISSN (p): 2278-8719 PP 23-38
- [22]. Dara Ashok¹, M.V. Mallikarjun² and Venkata Ramesh Mamilla³ (2012), DESIGN AND STRUCTURAL ANALYSIS OF COMPOSITE MULTI LEAF SPRING, ISSN 2249-6149 Issue 2, Vol.5
- [23]. K. K. Sharma¹, S. R. Mandale, K. K. Sharma¹, S. R. Mandale ISSN (e): 2250-3021, ISSN (p): 2278-8719 PP 29-33
- [24]. Sunil Chintha, N. Jeevan Kumar, 2013, Design and Analysis of Leaf Spring, *Global Journal of Science and Technology (Special)* Vol. 12, Issue 1
- [25]. Vivek Rai*, Gaurav Saxena, 2013, Development of a Composite Leaf Spring for a Light Commercial Vehicle (Tata Magic), Vol. 3, Issue 5, Sep-Oct 2013, pp.110-114
- [26]. Baviskar A. C. 1, Bhamre V. G. 2, Sarode S. S., (2013) Design and Analysis of a Leaf Spring for automobile suspension system: A Review, (ISSN 2250-2459, ISO 9001:2008 Certified Journal, Volume 3
- [27]. Ritesh Kumar Dewangan*, Manas Patnaik**, Narendra Yadav (2012), Minimization of Stress of a Parabolic Leaf Spring by Simulated Annealing Algorithm, ISSN: 2248-9622 Vol. 2, Issue 4, July-August 2012, pp.457-460
- [28]. Mr. V. K. Aher*, Mr. P. M. Sonawane, 2012, Static and Fatigue Analysis of Multi Leaf Spring Used in the Suspension System of LCV, ISSN: 2248-9622, Vol. 2, Issue 4, July-August 2012, pp.1786-1791
- [29]. Achameleh A. Kassie¹, R. Reji Kumar¹ and Amrut Rao, 2014, DESIGN OF SINGLE COMPOSITE LEAF SPRING FOR LIGHT WEIGHT VEHICLE, ISSN 2278 – 0149 www.ijmerr.com Vol. 3, No. 1,
- [30]. Gulursiddaramanna SHIVA SHANKAR*, Sambagam VIJAYARANGAN, 2006, Mono Composite Leaf Spring for Light Weight Vehicle – Design, End Joint Analysis and Testing, ISSN 1392–1320 MATERIALS SCIENCE (MEDŽIAGOTYRA). Vol. 12, No. 3. 2006