




## Renewable and Nonrenewable Energy

Vol: 5(2), 2026

REST Publisher; ISBN: 978-81-948459-2-8

Website: <https://restpublisher.com/book-series/ese/>

DOI: <https://doi.org/10.46632/rne/5/2/4>



# Structural Optimization of a Polymeric Composite Automotive Chassis Frame

\*K. Kalyani Radha, B. Omprakash

JNTUACEA, Ananthapuramu, Andhra Pradesh, India.

\*Corresponding Author Email: [radha.mech@jntua.ac.in](mailto:radha.mech@jntua.ac.in)

**Abstract:** The chassis frame forms the backbone of a vehicle; its principal function is to safely carry the maximum load for all designed operating conditions. This paper describes design and analysis of vehicle chassis. Weight reduction is now the main issue in automobile industries. In the present work, the dimensions of an existing vehicle chassis frame of a MAHINDRA BOLERO vehicle is taken for modeling and analysis of a vehicle chassis frame with three different composite materials namely, Carbon/Epoxy, E-glass/Epoxy and S-glass/Epoxy subjected to the same pressure as that of a steel chassis frame. The design constraints were stresses and deflections. The three different composite vehicle chassis frames have been modeled by considering three different cross-sections. Namely C, I and Box type cross sections. For validation the design is done by applying the vertical loads acting on the horizontal different cross sections. Software's used in this work are PRO – E for modeling, ANSYS for analysis.

## 1. INTRODUCTION

Chassis is a French term and was initially used to denote the frame parts or Basic Structure of the vehicle. A vehicle without body is called Chassis. The components of the vehicle like Power plant, Transmission System consisting of clutch gearbox, propeller shaft and rear axle, Wheels, Suspension, and Controlling Systems like Braking, steering etc., and electrical system parts are also mounted on the Chassis frame. So, it is also called as Carrying Unit. Chassis of Automotive helps to keep an automobile rigid, stiff and unbending. Automobile chassis ensures less noise, vibrations and harshness throughout the automobile. Along with the strength, an important consideration in the chassis design is to increase the stiffness (bending and torsion) characteristics. In the conventional design procedure, the design is based on the strength and emphasis is then given to increase the stiffness of the chassis, with very little consideration to the weight of the chassis. One such design procedure involves the adding of structural cross member to the existing chassis to increase its torsional stiffness. As a result, weight of the chassis increases. This increase in weight reduces the fuel efficiency and increases the cost due to extra material. The design of the Chassis with adequate stiffness and strength is necessary. All most all components weight is acting on the chassis frame, thus chassis subjected to static, dynamic and cyclic loading condition on the road. Static stress analysis is important to point out critical (highest stress) regions in the frame. These critical regions may cause fatigue failures. In this study, ladder type chassis frame is analysed. The Chassis consists of side members attached with a series of cross members to complete the ladder like structure, thus its name. The FEM is a common tool for stress analysis. FEM with required boundary conditions was used to determine critical regions in the chassis frame. Static structural analysis is performed to identify critical regions and based on the results obtained design modification has been done.

**There are three types of frames:**

**a) Conventional control chassis:** In which engine is mounted in front of the driver's cabin. This type of arrangement avoids full utilization of the space. It is non-load carrying frame. The loads of the vehicle are transferred to the

suspensions by the frame. The suspension in the main skeleton of the vehicle is supported on the axles through springs. The body is made of flexible material like wood and isolated frame by inserting rubber mountings in between. The frame is made of channel section or tubular section of box section.

**b) Semi-forward control chassis:** In which engine is mounted that half of it is in the driver's cabin whereas the other half is in front, outside the driver's cabin. In this case the rubber mountings used in conventional frame between frame and suspension are replaced by more stiff mountings. Because of this some of the vehicle load is shared by the frame also. This type of frame is heavier in construction.

**c) Full-forward control chassis:** In which engine is mounted completely inside the driver's cabin. Obviously maximum utilization of space is achieved in this type of arrangement. The Different Types Of Automobile Chassis Frame Are As Follows:

**d) Conventional Frame:** It is non-load carrying frame. The loads of the vehicle are transferred to the suspensions by the frame. This suspension in the main skeleton of the vehicle is supported on the axles through springs. The body is made of flexible material like wood and isolated frame by inserting rubber mountings in between. The frame is made of channel section or tubular section of box section.

**e) Ladder Chassis:** Ladder chassis is one of the oldest forms of automotive chassis these are still used in most of the SUVs today. It is clear from its name that ladder chassis resembles a shape of a ladder having two longitudinal rails inter linked by lateral and cross braces.

#### **Types of ladder frame:**

Ladder frame are classified as follows.

- C cross section type of ladder chassis frame
- I cross-section type of ladder chassis frame.
- Rectangular Box cross section type of ladder chassis frame.
- Rectangular Box (Intermediate) cross section type.

## **2. LITERATURE REVIEW**

MohdAzizi Muhammad Nor et al. (2012) this paper aims to model simulate and perform the stress analysis of an actual low loader structure consisting of I-beams design application designed in-house by Sumai Engineering Sdn. Bhd, (SESB). The material of structure is Low Alloy Steel a 710 C (Class 3) with 552 MPa of yield strength and 620 MPa of tensile strength. Finite element modeling (FEM), simulations and analysis are performed using modeling software i.e. Pro E. Firstly, a 3-D model of low loader based on design from SESB is created by using Pro E. Stress and displacement contour are later constructed and the maximum deflection and stress are determined by performing stress analysis. Computed results are then compared to analytical calculation, where it is found that the location of maximum deflection agrees well with theoretical approximation but varies on the magnitude aspect. Safety factor for the low loader structure has also been calculated. In the end, the current study is important for further improvement of the current low loader chassis design. Swami K.I. et al. (Jan. 2014) The Automotive chassis is considered as the backbone of the vehicle. An important consideration in chassis design is to have adequate bending stiffness for better handling characteristics. So, strength and stiffness are two important criteria for the design of the chassis. This paper related with work performed towards the static structural analysis of the truck chassis. Structural systems like the chassis can be easily analyzed using the finite element techniques. So a proper finite element model of the chassis is to be developed. The chassis is modeled in ANSYS. Analysis is done using the same software. Roslan and Rahman does stress analysis on heavy duty truck chassis by finite element package ABAQUS. To improve the fatigue life of components at critical point by design modifications the stresses can be reduced. Used ASTM low alloy steel a 710 C (Class 3) with 552 MPa of yield strength and 620 MPa of tensile strength for chassis founds the maximum stress 386.9 MPa at critical point occurred at opening of chassis which was in contacted with the bolt from it concludes, that this critical point is an initial to probable failure

### 3. COMPOSITE MATERIALS

A composite material is usually made up of at least two materials out of which one is the binding material, also called matrix and the other is the reinforcement material. Composites are materials that comprise strong load carrying material (known as reinforcement) imbedded in weaker material (known as matrix) with physically separable phases. Reinforcement provides strength and rigidity, helping to support structural load. The matrix or binder maintains the position and orientation of the reinforcement. Significantly, constituents of the composites retain their individual, physical and chemical properties yet together they produce a combination of qualities which individual constituents would be incapable of producing alone. The reinforcement may be platelets, particles or fibers and are usually added to improve mechanical properties such as stiffness, strength and toughness of the matrix material.

### 4. MATERIAL PROPERTIES

TABLE 1. Properties Of Materials

Properties	E-Glass	Carbon epoxy	S-Glass	Stainless steel
Young's Modulus (GPa)	72.5	388	85	193
Poisson's Ratio	0.28	0.358	0.22	0.31
Density (kg/m <sup>3</sup> )	2580	1600	2490	7750
Tensile Strength (GPa)	3.45	4.1	4.6	3.2

### 5. MODELING OF CHASSIS FRAME



FIGURE 1. I-Section Chassis frame

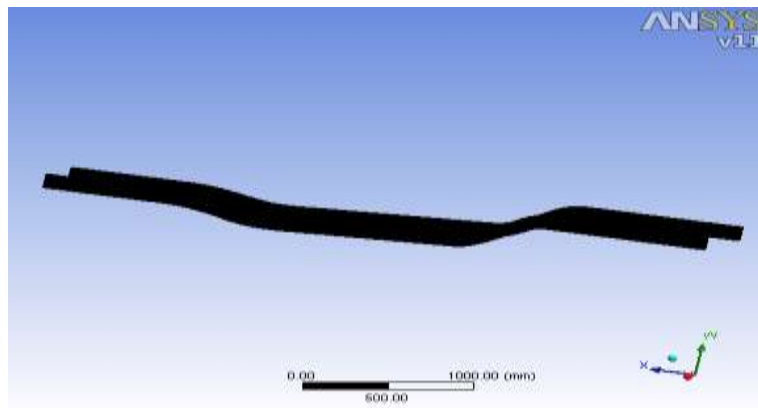


**FIGURE 2.** Box chassis frame



**FIGURE 3.** C-section Chassis frame

## 6. STRUCTURAL ANALYSIS OF RECTANGULAR CHASSISFRAME



**FIGURE 4.** Mesh Generation on rectangular section chassis frame

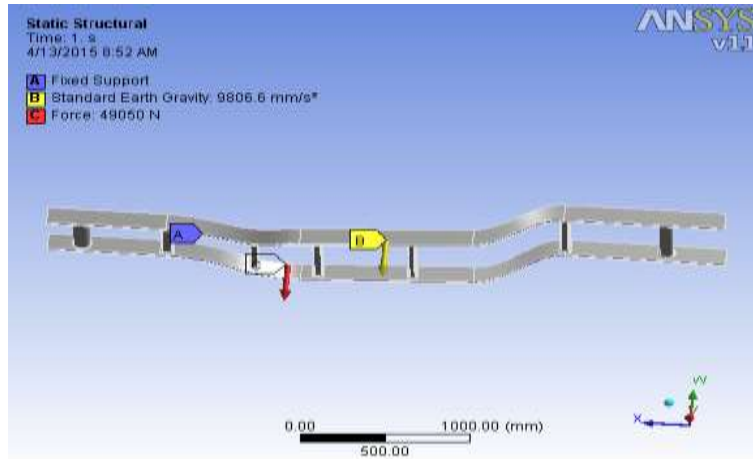


FIGURE 5. Fixed support and force application on rectangular section chassis frame

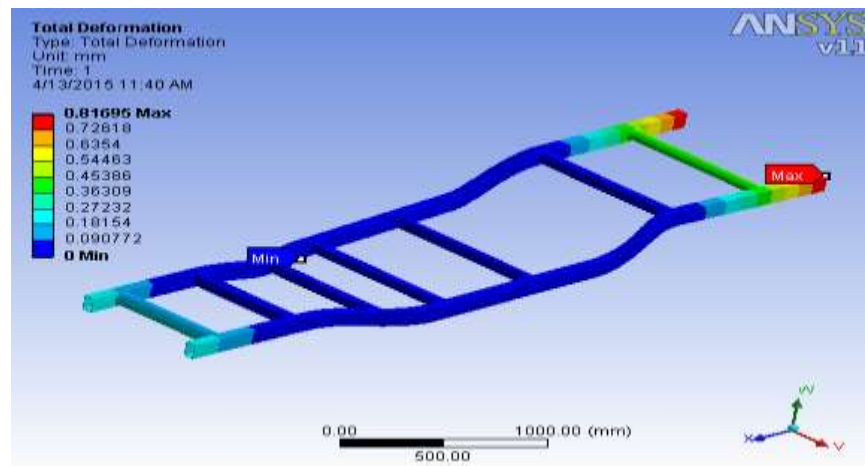


FIGURE 6. Total deformation for rectangular section chassis frame-Carbon epoxy

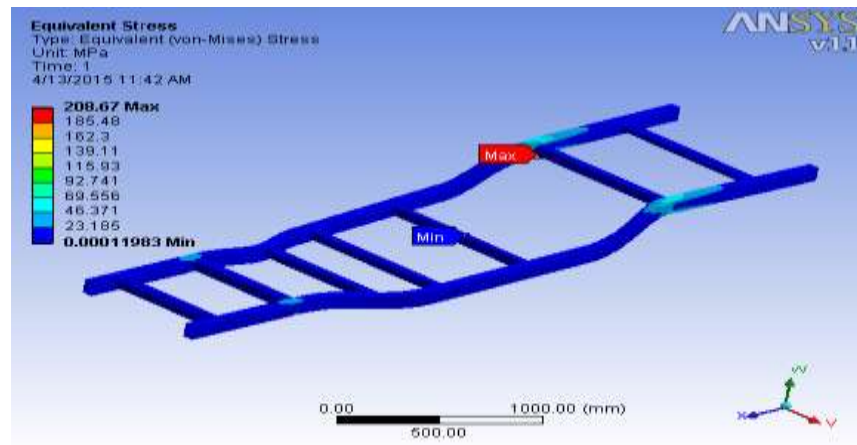


FIGURE 7. Equivalent stress for rectangular section chassis frame- Carbon epoxy

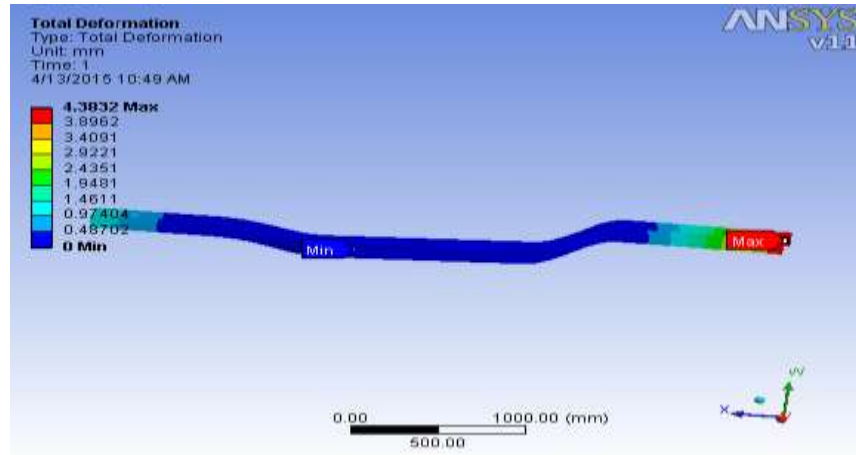


FIGURE 8. Total deformation for rectangular section chassis frame-E-Glass fiber.

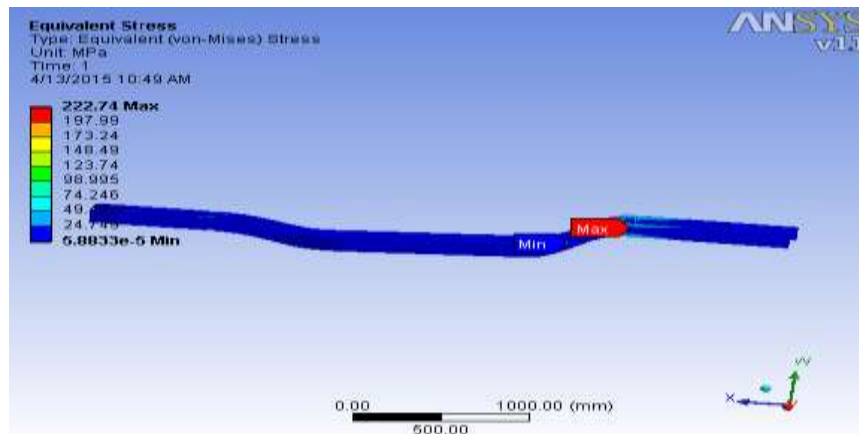


FIGURE 9. Equivalent stress for rectangular section chassis frame-E-Glass fiber

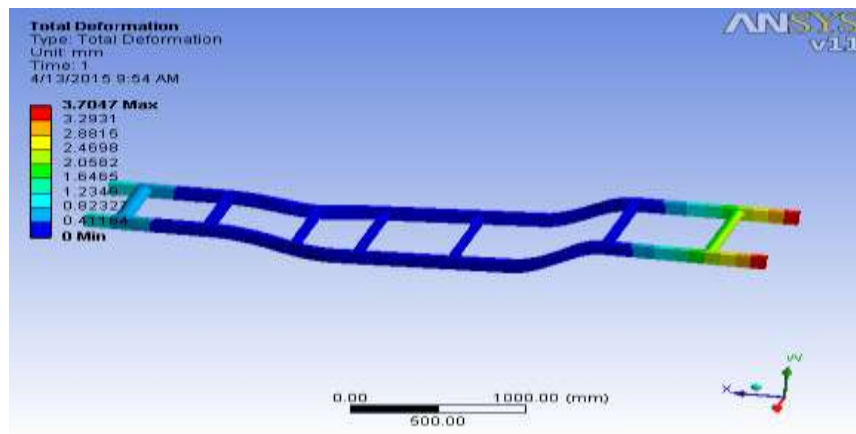


FIGURE 10. Total deformation for rectangular section chassis frame-S-Glass fiber

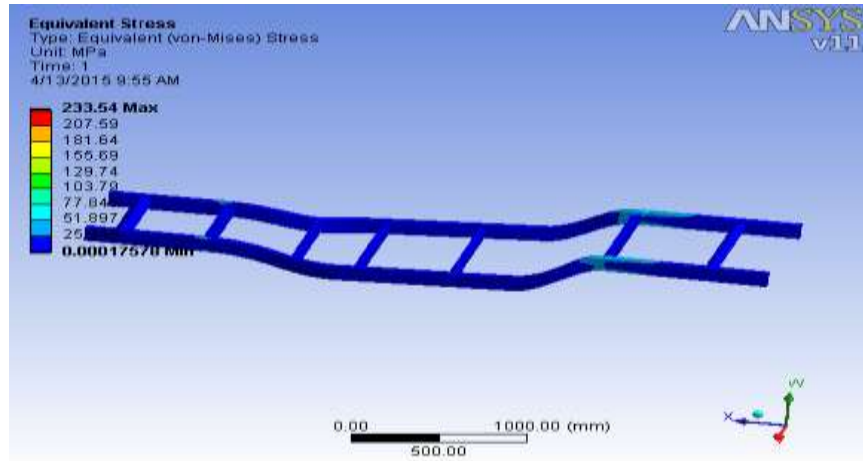


FIGURE 11. Equivalent stress for rectangular section chassis frame-S-Glass fiber

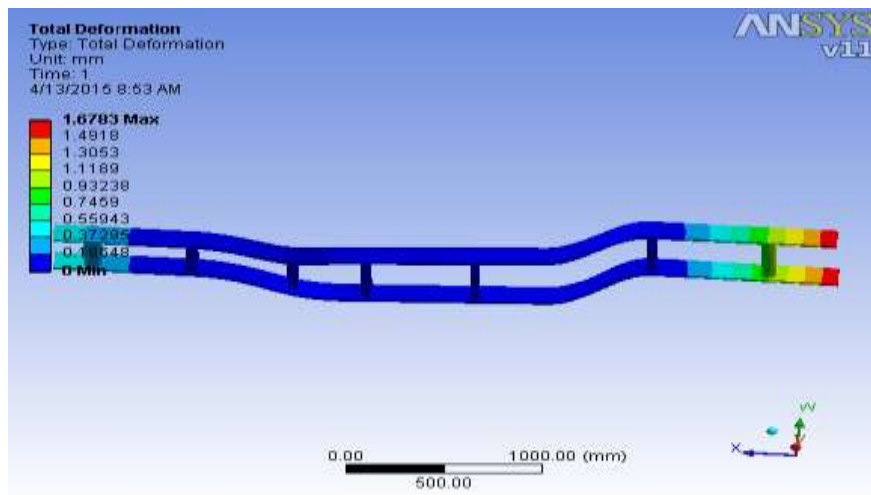


FIGURE 12. Total deformation for rectangular section chassis frame-Stainless steel-Glass fiber

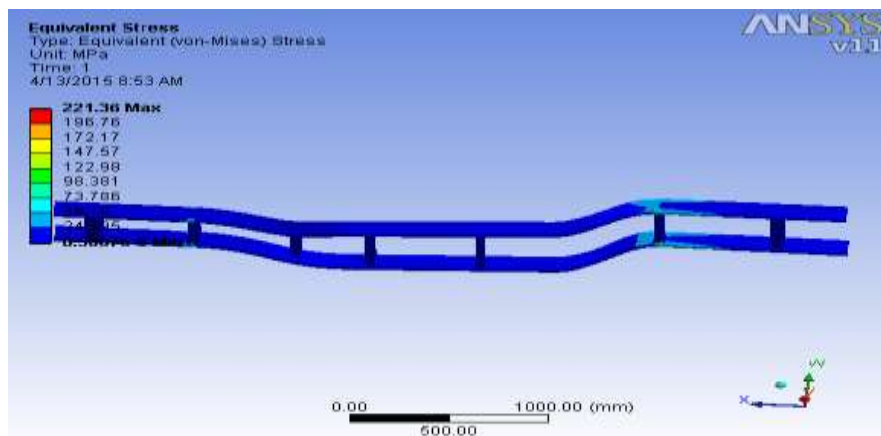


FIGURE 13. Equivalent stress for rectangular section chassis frame- Stainless steel-Glass fiber

## 7. STRUCTURAL ANALYSIS OF C-SECTION CHASSIS FRAME

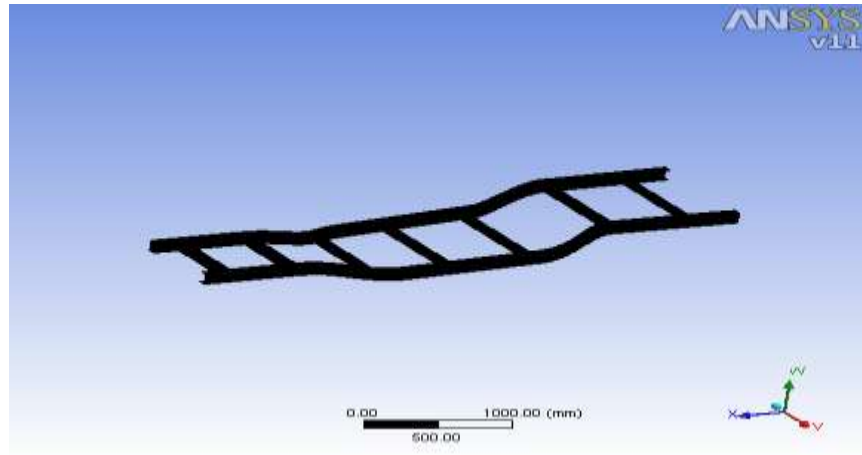


FIGURE 14. Mesh Generation on C- section chassis frame

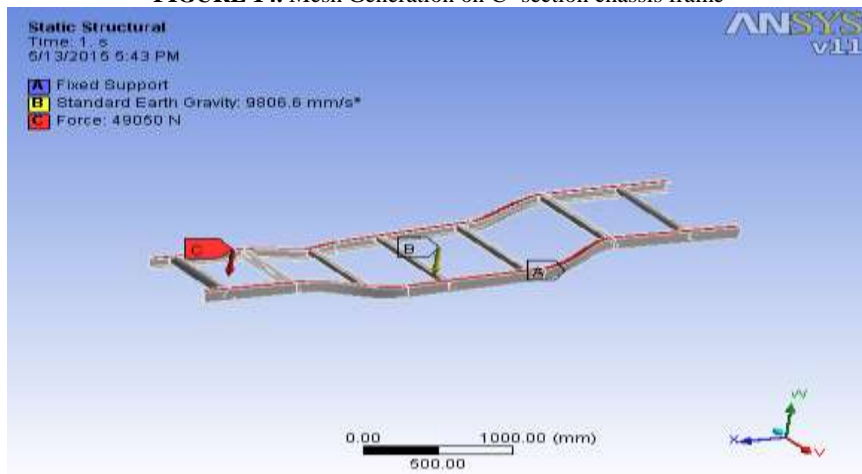


FIGURE 15. Fixed support and force application on C- section chassis frame

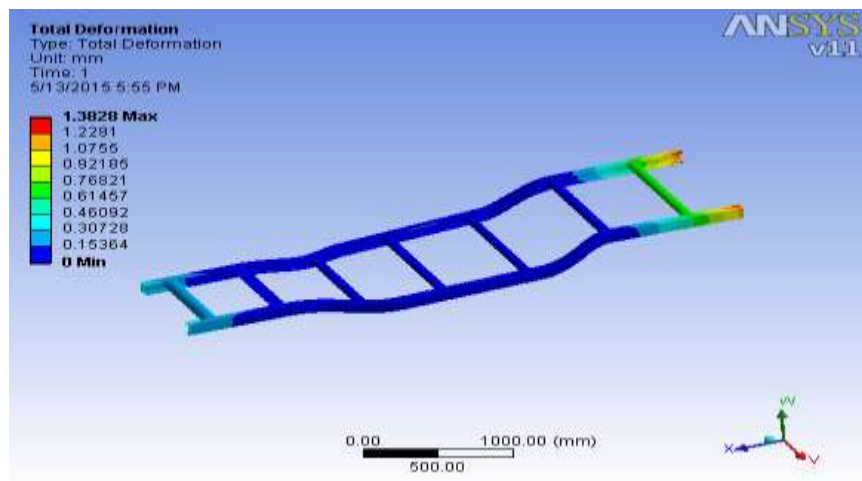


FIGURE 16. Total deformation for C- section chassis frame-Carbon epoxy

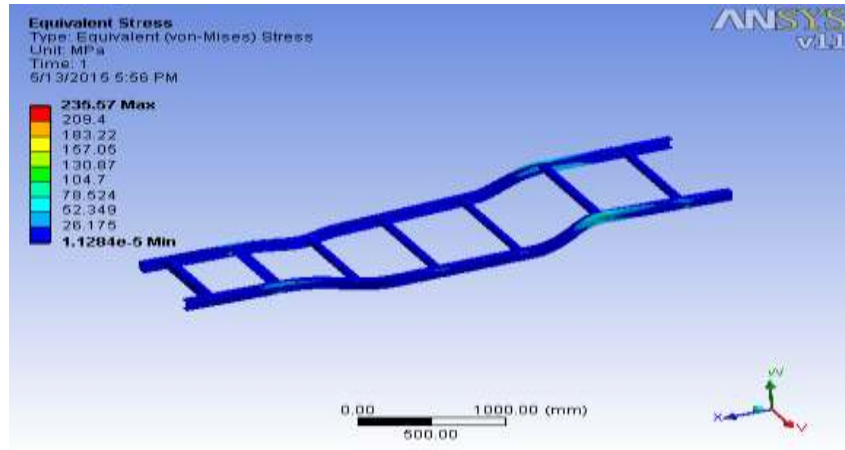


FIGURE 17. Equivalent stress for C- section chassis frame- Carbon epoxy

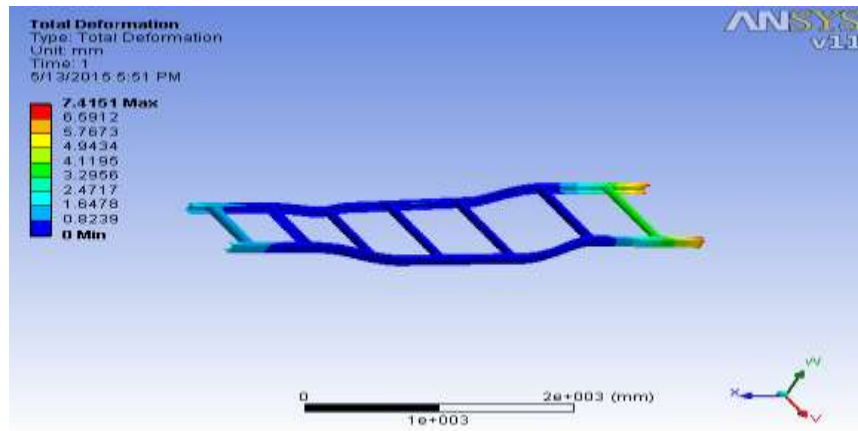


FIGURE 18. Total deformation for C- section chassis frame-E-Glass fiber

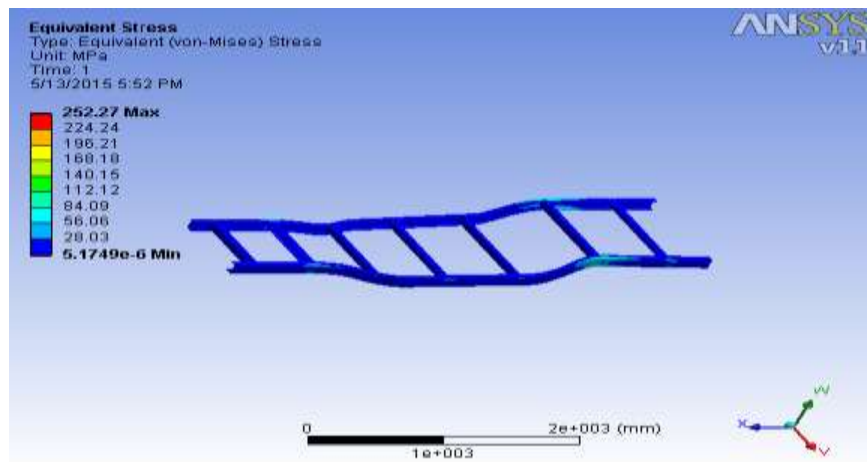


FIGURE 19. Equivalent stress for C section chassis frame-E-Glass fiber

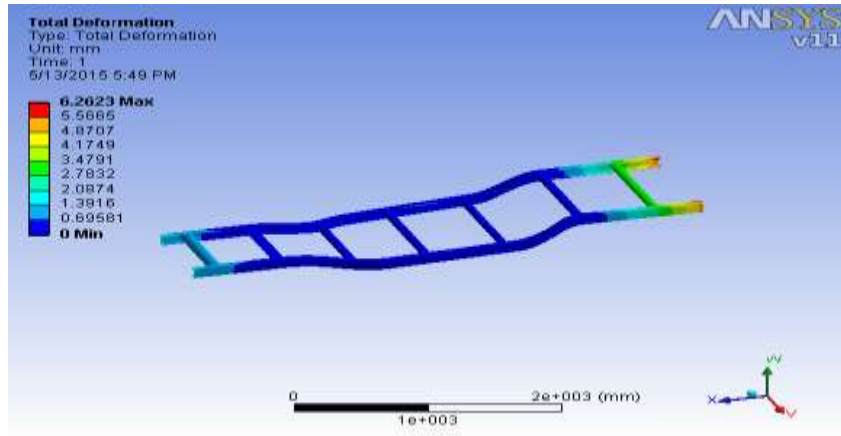


FIGURE 20. Total Deformation for C-section chassis frame-S-glass fiber

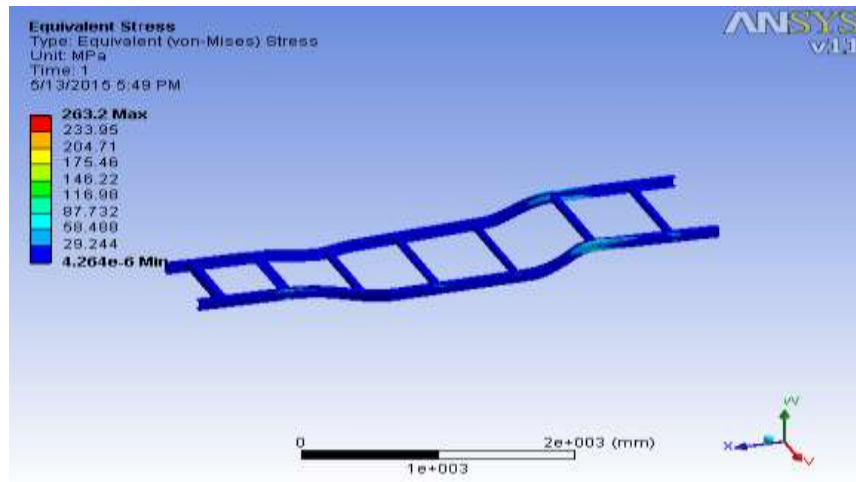


FIGURE 21. Equivalent stress for C section chassis frame-S-Glass fiber

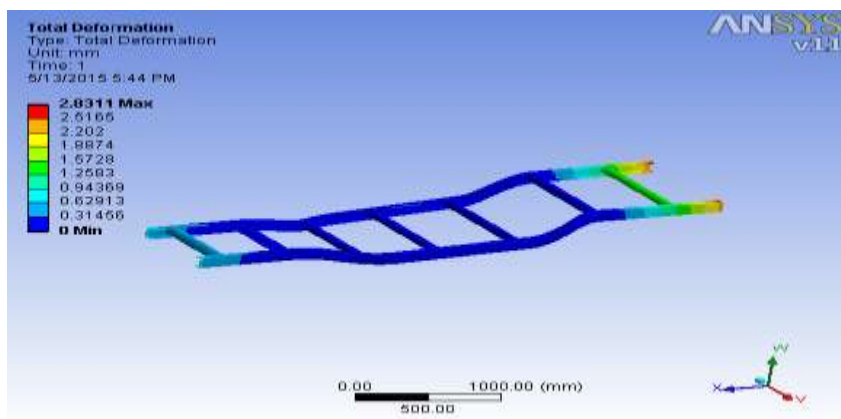


FIGURE 22. Total Deformation for C-section chassis frame-Stainless Steel-glass fiber

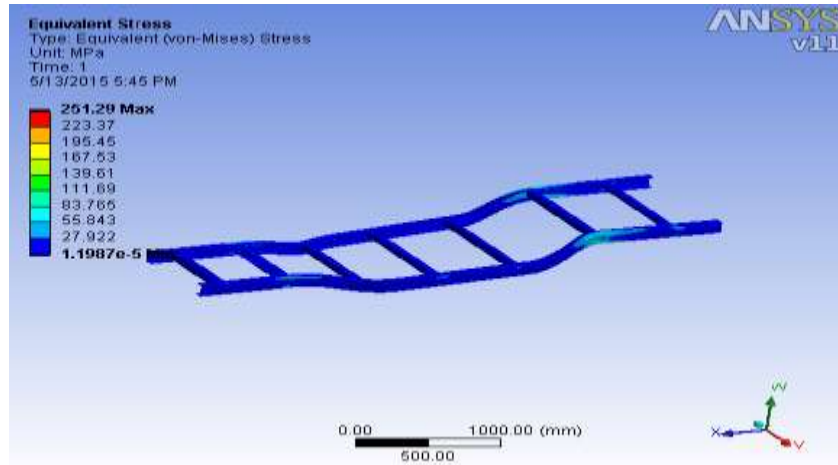


FIGURE 23. Equivalent stress for C section chassis frame-Stainless steel-Glass fiber

## 8. STRUCTURAL ANALYSIS OF I-SECTION CHASSIS FRAME

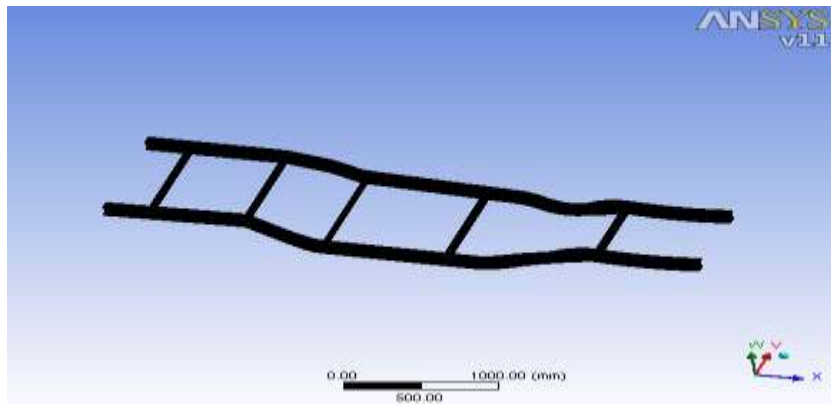


FIGURE 24. Mesh Generation on I- section chassis frame

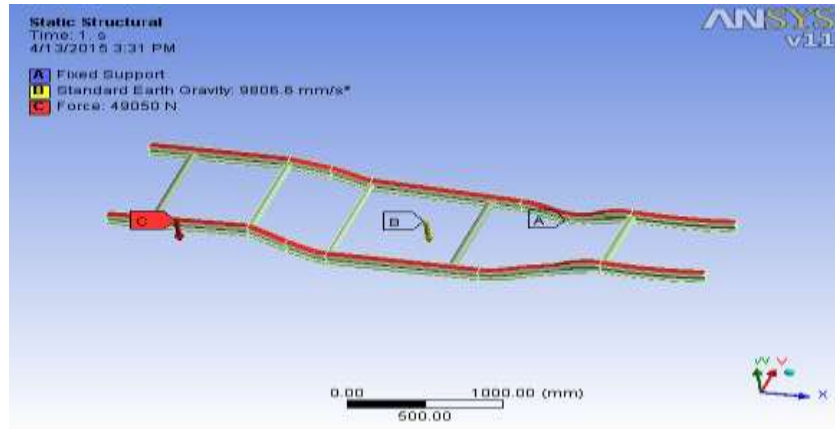


FIGURE 25. Fixed support and force application on I- section chassis frame

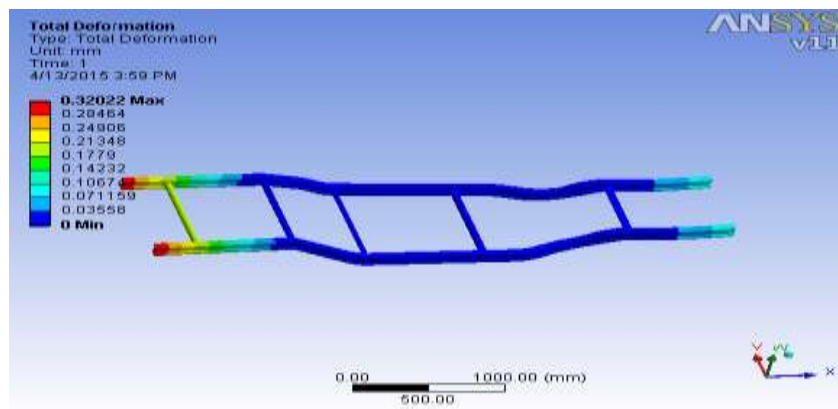


FIGURE 26. Total deformation for I- section chassis frame-Carbon epoxy

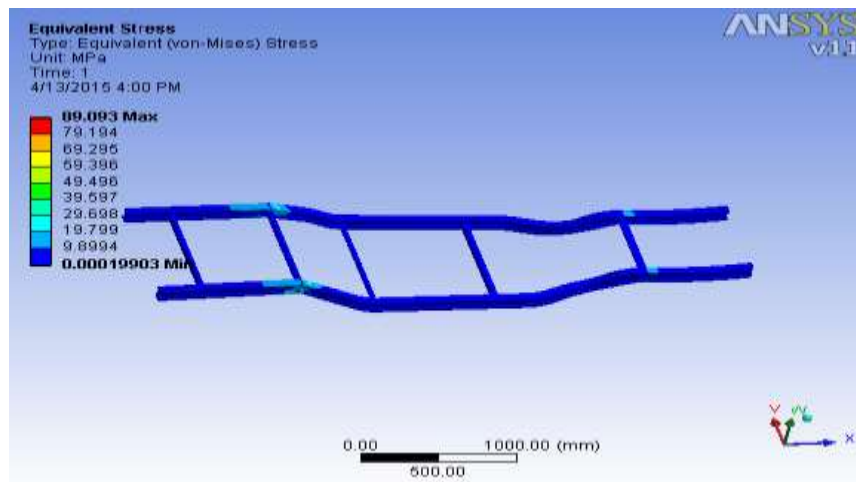


FIGURE 27. Equivalent Stress for I- section chassis frame-Carbon epoxy

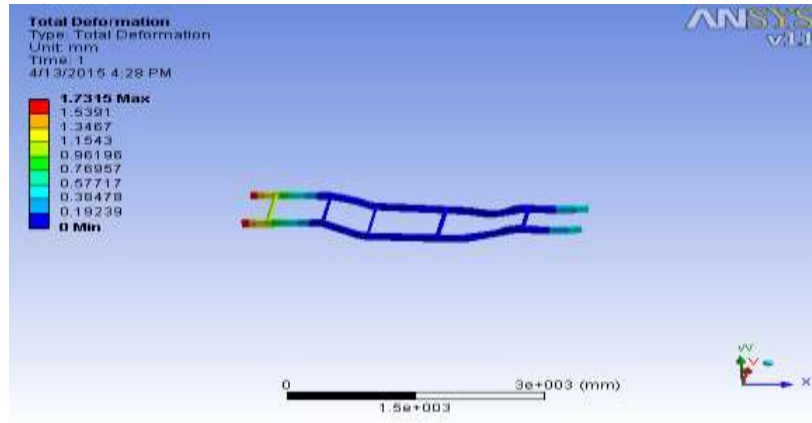


FIGURE 28. Total deformation for I- section chassis frame-E-Glass fiber

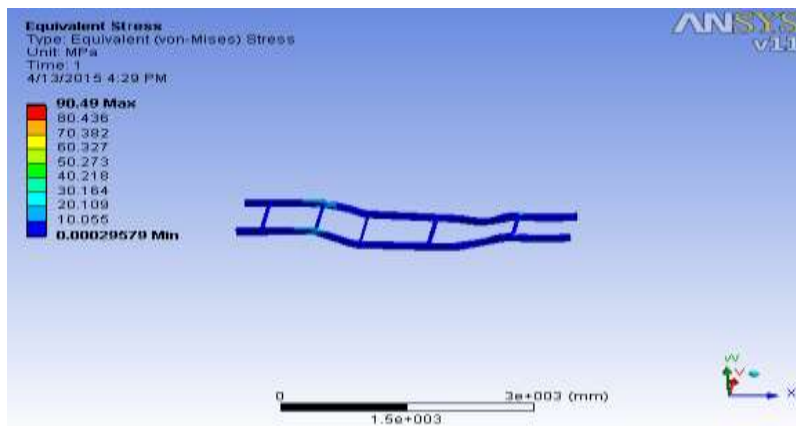


FIGURE 29. Equivalent Stress for I- section chassis frame-E-Glass fiber

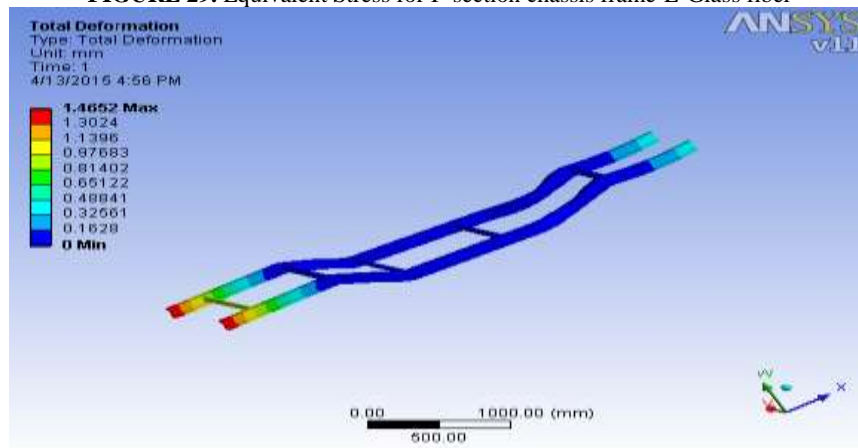


FIGURE 30. Total deformation for I- section chassis frame-S-Glass fiber

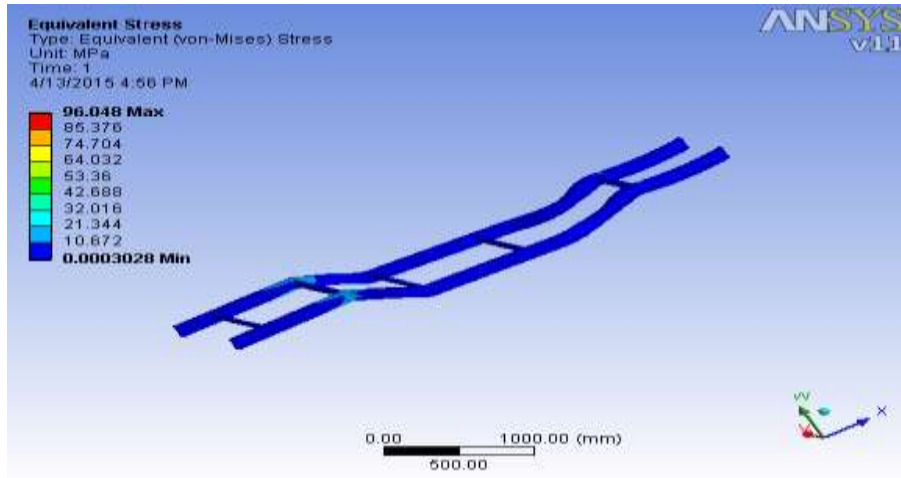


FIGURE 31. Equivalent Stress for I- section chassis frame-S-Glass fiber

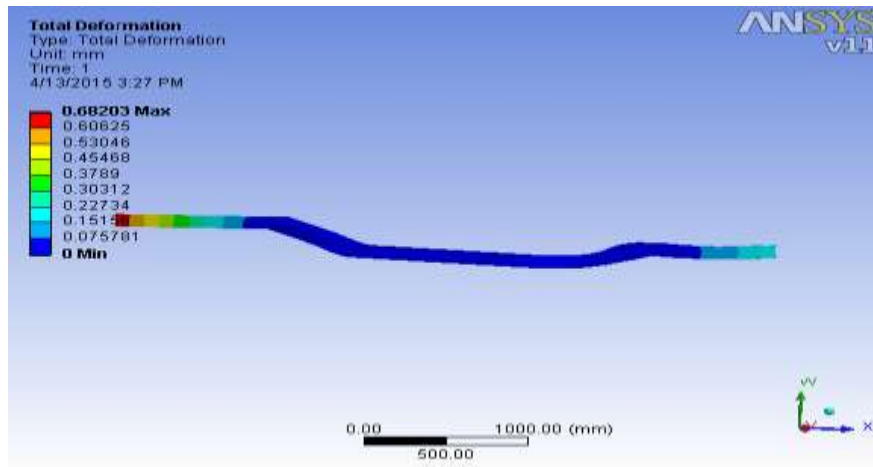


FIGURE 32. Total deformation for I- section chassis frame-Stainless steel

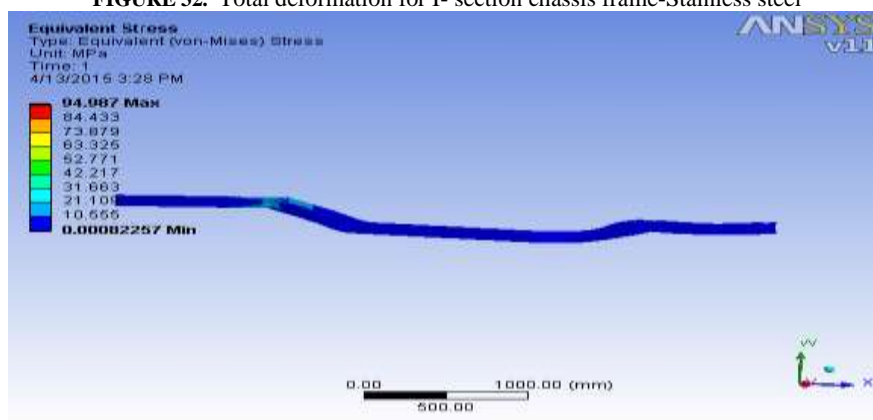


FIGURE 33. Equivalent Stress for I- section chassis frame-stainless steel

## 9. ANALYSIS RESULTS

TABLE 2. Analysis Results for Stainless Steel

Shape Material	Stainless Steel	
	Total Deformation (Mm)	Equivalent Stress (Mpa)
BOX	1.6783	221.36
C-Section	2.8311	251.29
I-Section	0.68203	94.987

**TABLE 3.** Analysis Results for Carbon-Epoxy

Shape Material	Carbon Epoxy	
	Total Deformation (Mm)	Equivalent Stress (Mpa)
BOX	0.81695	208.67
C-Section	1.3828	235.27
I-Section	0.32022	89.093

**TABLE 4.** Analysis Results For E-Glass

Shape Material	E-Glass	
	Total Deformation (Mm)	Equivalent Stress (Mpa)
BOX	4.3832	222.74
C-Section	7.4151	252.27
I-Section	1.7315	90.49

**TABLE 5.** Analysis Results For S-Glass

Shape Material	S-Glass	
	Total Deformation (Mm)	Equivalent Stress (Mpa)
BOX	3.7047	233.54
C-Section	6.2623	263.2
I-Section	1.4652	96.048

## 10. CONCLUSION

- From the structural Analysis it is concluded that Equivalent stresses and total deformations are more in C type Cross section and less in I type cross section where as Box type cross section offers moderate total deformation and equivalent stresses.
- Considering polymeric composites Carbon/Epoxy, E-glass/Epoxy and S-glass /Epoxy for chassis material, based on the results it was inferred that carbon/epoxy polymeric composite vehicle chassis with I-SECTION has superior strength and stiffness and lesser in weight compared to steel and other polymeric composite materials mentioned.
- From the results, it is concluded that the polymeric composite vehicle chassis is lighter and more economical than the conventional steel chassis with similar design specifications.

## REFERENCES

- [1]. Dave Anderson and Grey Schede, "Development of a Multi- Body Dynamic Modal of Tractor – Semi trailer for Ride Quality Prediction", International Truck and Engine Corp. 2001.
- [2]. I.M. Ibrahim, D.A.Crolla and D.C. Barton, "Effect of Frame Flexibility on the Ride Vibration of Trucks", Department of Mechanical Engineering, University of Leeds LS2 9JT, U.K. August 1994.
- [3]. Pomulo Rossi Pinto Filho, "Automotive Frame Optimization", Universidad Federal de Uberlandia. November 2003.
- [4]. Zaman @ Bujang, Izzudin and Abd. Rahman, Roslan (2006), "Application of Dynamic Correlation Technique and Model Updating on Truck Chassis", 1<sup>st</sup> Regional Conference on Vehicle Engineering & Technology, July 2006.
- [5]. Lonny L. Thomson, Jon K. Lampert and E. Harry Law, "Design of a Twist Fixture to measure the Torsional Stiffness of a Winston Cup Chassis", Department of Mechanical Engineering, Clemson Univ.1998.
- [6]. Murali M.R. Krisna, "Chassis Cross-Member Design Using Shape Optimization", International Congress and Exposition Detroit, Michigan. February 23-26, 1998.
- [7]. Wesley Linton, "Analysis of Torsional Stiffness and Design Improvement Study of a Kit Car Prototype", Cranfield University, September 2002.
- [8]. Marco Antonio Alves Jr, Helio Kitagawa and Celso Nogueira, "Avoiding Structural Failure Via Fault Tolerant Control – An Application on a Truck Frame", Detroit, Michigan November 18-20, 2002.